


# Kanaflo FG (210 HFG)

Heavy-duty food grade suction and discharge hose

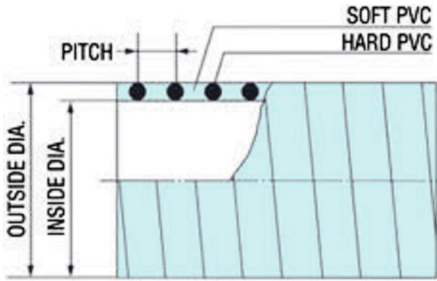

## SPECIFICATIONS

**Temp. Range:** -13°F to 140°F

**Applications:** Heavy-duty food grade suction hose for bottling and dairy industries

**Construction:** Produced entirely of compounds in compliance with FDA and 3-A nontoxic specifications, flexible PVC, rigid PVC helix, smooth bore, smooth O.D.

**Note:** Made with NSF51 approved materials

## AVAILABLE SIZES

| Inside Dia. Inches | Outside Dia. Inches | Pitch Inches | Minimum Bend Radius 72°F, Inches | Working Pressure 72°F, P.S.I. | Vacuum Rating 72°F, In Hg | Weight Lbs/Ft | Standard Length Ft |
|--------------------|---------------------|--------------|----------------------------------|-------------------------------|---------------------------|---------------|--------------------|
| 3/4                | .96                 | 0.22         | 1.9                              | 86                            | 29.8                      | 0.16          | 100                |
| 1                  | 1.25                | 0.22         | 1.9                              | 86                            | 29.8                      | 0.26          | 100                |
| 1-1/4              | 1.54                | 0.26         | 2.7                              | 79                            | 29.8                      | 0.37          | 100                |
| 1-1/2              | 1.82                | 0.30         | 2.8                              | 72                            | 29.8                      | 0.44          | 100                |
| 2                  | 2.39                | 0.33         | 3.9                              | 72                            | 29.8                      | 0.74          | 100                |
| 2-1/2              | 2.93                | 0.37         | 5.0                              | 72                            | 29.8                      | 1.01          | 100                |
| 3                  | 3.43                | 0.37         | 7.0                              | 62                            | 29.8                      | 1.21          | 100                |
| 4                  | 4.53                | 0.43         | 9.1                              | 55                            | 29.8                      | 2.01          | 100                |

